GERTSCH PROD.
STANDARD RATIO TRANSFORMER
MODEL PT SERIES
7101548

PROPERTY OF DEPT. B-260
CALIB. AUTH. & STANDARDS
DO NOT
REMOVE FROM AREA

Gertsch Products Inc.

Los Angeles, California

Standard Ratio Transformer

Model PT Series

ADVANCO

PRESSBOARD BINDER

No. 218-R

MADE IN U. S. A.

GERTSCH

INSTRUCTION BOOK

FOR

MODEL PT SERIES

STANDARD RATIO TRANSFORMER

PROPERTY OF DEPT. B-260
CALIBRATION & STANDARDS
DO NOT
REMOVE FROM AREA

ELECTRONIC INSTRUMENTS

OPERATING INSTRUCTIONS

FOR

MODEL PT SERIES

STANDARD RATIO TRANSFORMERS

PROPERTY OF DEPT. B-260
CALIBRATION & STANDARDS
DO NOT
REMOVE FROM AREA

GENERAL RADIO COMPANY
1000 Mississippi Avenue
Los Angeles 25, California

GERTSCH

PT-SERIES

Standard Ratio Transformers

PT-1
Carrying Case Model
(Typical)

PRECISION AC VOLTAGE DIVIDERS

GENERAL DESCRIPTION PT SERIES STANDARD RATIO TRANSFORMERS

Precision Auto-Transformers capable of Extreme Accuracy and Resolution in the Measurement and Generation of AC Voltage Ratios.

The same basic principle of operation is applicable to all units in the Series, however each has been designed for a specific application.

PT-1 A wide frequency range unit with limited input voltage characteristics at lower frequencies. Uses push button selection for the first three digits and a ten turn potentiometer for the remaining.

PT-2 Covers the same frequency and voltage ranges as the PT-1. The potentiometer is eliminated and replaced with two push button selected decades, allowing five decade push button selection.

PT-3 Mechanically identical to the PT-2, i.e., uses five push button selected decades. Designed specifically for higher voltage inputs at the lower frequencies, necessarily restricting the high frequency range.

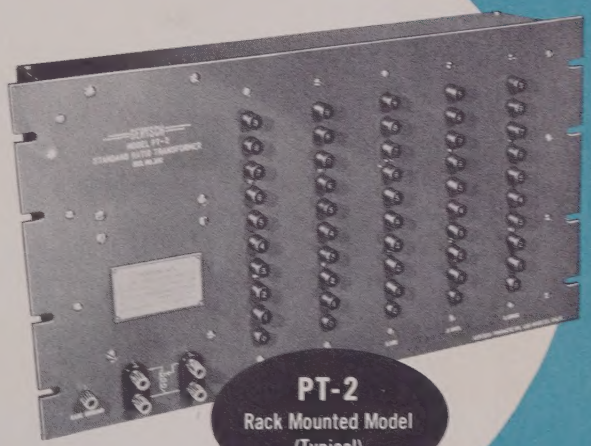

PT-2
Rack Mounted Model
(Typical)

GERTSCH PRODUCTS, INC.

11846-48 Mississippi Avenue
Los Angeles 25, California
Phone BRadshaw 2-1795

MECHANICAL SPECIFICATIONS

Each unit in the Series is available either with drawn aluminum carrying case (with removable front cover) or rack mounted (with protective dust cover). Rack mounted units can be supplied complete with aluminum case at additional charge. When ordering, specify carrying case type, rack mounted type, or rack mounted type with case.

	PT-1	PT-2	PT-3
DIMENSIONS	Rack 19 x 10½ x 4 in. Case 11 x 13 x 5¾ in.	Rack 19 x 10½ x 4 in. Case 11 x 13 x 9 in.	Rack 19 x 10½ x 9 in. Case 11 x 13 x 9 in.
WEIGHT	10 lbs.	13½ lbs.	22 lbs.

FRONT VIEW PT-3 (Cover Remov

GERTSCH

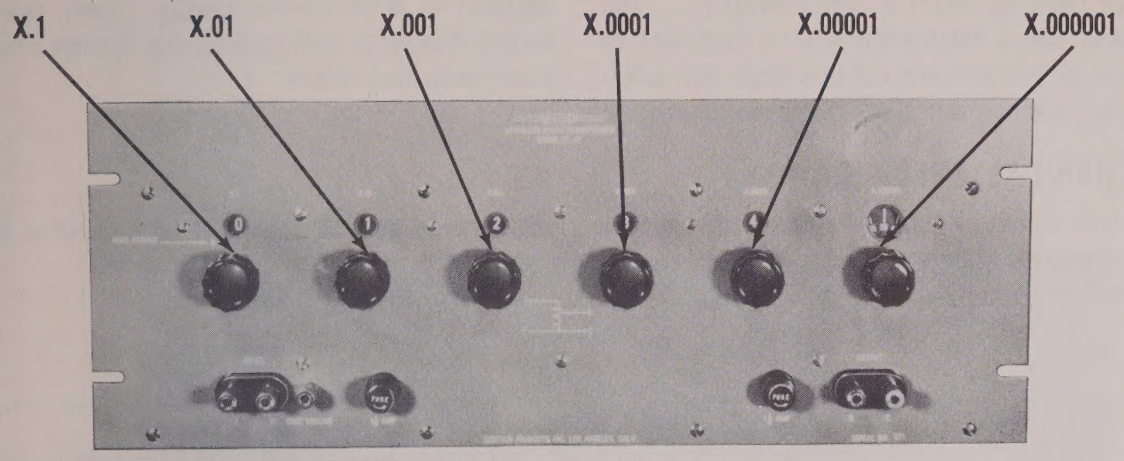

PT-5 shown above — typical Rack Mounted Model
PT-4 similar except for size (see dimensions)

STANDARD RATIO TRANSFORMER – PT-5

Shown here are versions of the PT-5 Standard Ratio Transformer. Above, rack mounted model; below, case model with convenient new handle for either carrying or for easy reading in table position.

Convenient tilt-up handle

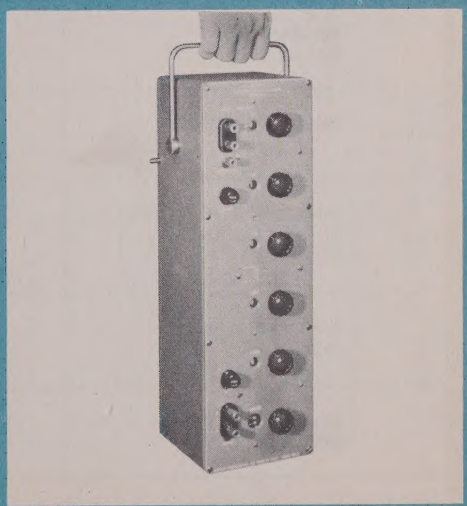

GERTSCH PRODUCTS, INC.

11846-48 Mississippi Avenue
Los Angeles 25, California

GENERAL DESCRIPTION

The PT-4 and PT-5 permit rapid selection of accurate voltage ratios by means of rotary switches . . . Two toroidally wound autotransformers are controlled by five decade switches followed by a single turn potentiometer, providing continuous resolution and readout of better than six significant figures . . . Ratio value is indicated as direct decimal reading . . . Every switch position displays its corresponding digit through a dust proof transparent window.

MECHANICAL SPECIFICATIONS

Each unit is available either in a cast aluminum case or rack mounted with cast aluminum dust cover. Carrying case models are provided with dual purpose handles. These may be used for carrying the instrument or for bench "Tilt-Up" operation. (See PT-5 photo).

DIMENSIONS

	PT-4	PT-5
Case	17" x 8¼", 6¾" high	17" x 5¼", 5½" high
Rack	Std. 8¾", 6⅜" deep	Std. 7", 5¼" deep

SPECIFICATIONS

	PT-4	PT-5
Design Characteristics	High Voltage Input at Low Frequencies	Maximum Accuracy Min. Output Impedance
Recommended Frequency Range	30-1,000 cps.	50-10,000 cps.
Resolution % of Input	Continuous	Continuous
Accuracy of Indicated Ratio 30-1, 000 cps (PT-4) 50-3,000 cps (PT-5)	$\pm(.004\% + \frac{.0001\%}{R})$	$\pm(.004\% + \frac{.0001\%}{R})$
Accuracy of Indicated Ratio 3-10 KC.		$\pm(.01\% + \frac{.0001\%}{R})$
Maximum Input Voltage ERMS max.	2.5 f, f in cps. 350 volts above 140 cps.	.35 f, f in cps. 350 volts above 1,000 cps.
Maximum Effective Series Resistance (RS)	4—ohms	3—ohms
Maximum Effective Series Inductance (LS)	350 uh.	75 uh.
Phase Angle (Unloaded)	Dependent upon frequency and ratio setting, but very small.	

LITHOGRAPHED IN U.S.A. BY PARKER ENTERPRISE

HEAVY DUTY MODELS OF THE STANDARD RATIO TRANSFORMER

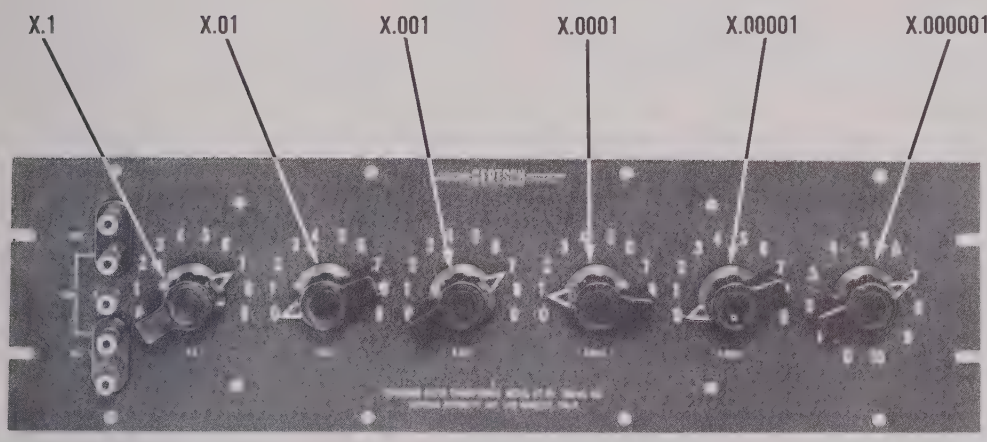

RACK MODEL
(Typical)

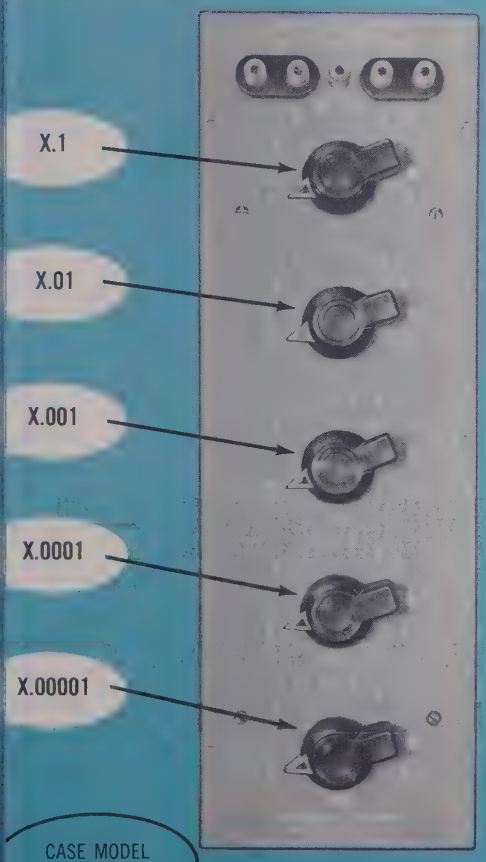

CASE MODEL
(Typical)

The following models of the PT Series have been designed for unusually heavy service, such as production or any continuous usage.

MECHANICAL SPECIFICATIONS

The PT-6, 7, 8 and 9 are available either with cast aluminum case (with "tilt-up" handle) or rack mounted (with protective dust cover). When ordering, specify case or rack mounted type by adding the letter R to the rack type units, i.e., PT-6R. Supplied with standard blue — gray finish. Special finishes available upon request.

MODEL	DIMENSIONS	WEIGHT (Unpacked)
PT-6 (CASE)	15½"x5"x7" (high)	9 lbs.
PT-6R (RACK)	19"x5¼"x7" (deep)	10 lbs.
PT-7 (CASE)	15½"x5"x7" (high)	9.5 lbs.
PT-7R (RACK)	19"x5¼"x6⅝" (deep)	11 lbs.
PT-8 (CASE)	17⅛"x8⅜"x6½" (high)	24 lbs.
PT-8R (RACK)	19"x8¾"x7" (deep)	25 lbs.
PT-9 (CASE)	17⅛"x8⅜"x6½" (high)	24 lbs.
PT-9R (RACK)	19"x8¾"x7" (deep)	25 lbs.

GERTSCH PRODUCTS, INC.

11846-48 Mississippi Avenue
Los Angeles 25, California
Phone BRadshaw 2-0568

SPECIFICATIONS—HEAVY DUTY MODELS

	PT-6	PT-7	PT-8	PT-9
Design Characteristics	Maximum Accuracy Min. Output Impedance	Maximum Accuracy Min. Output Impedance	High Voltage Input at Low Frequencies	High Voltage Input at Low Frequencies
Recommended Frequency Range	50-10,000 cps.	50-10,000 cps.	30-1,000 cps.	30-1,000 cps.
Resolution % of Input	.001% steps	Continuous	.001% steps	Continuous
Accuracy of Indicated Ratio 30-1, 000 cps (PT-4) 50-3,000 cps (PT-5)	$\pm(.004\% + \frac{.0001\%}{R})$	$\pm(.004\% + \frac{.0001\%}{R})$	$\pm(.004\% + \frac{.0001\%}{R})$	$\pm(.004\% + \frac{.0001\%}{R})$
Accuracy of Indicated Ratio 3-10 KC.	$\pm(.01\% + \frac{.0001\%}{R})$	$\pm(.01\% + \frac{.0001\%}{R})$		
Maximum Input Voltage ERMS max.	.35 f, f in cps. 350 volts above 1,000 cps.	.35 f, f in cps. 350 volts above 1,000 cps.	2.5 f, f in cps. 350 volts above 140 cps.	2.5 f, f in cps. 350 volts above 140 cps
Maximum Effective Series Resistance (RS)	2 ohms	3—ohms	3 ohms	4—ohms
Maximum Effective Series Inductance (LS)	75 uh.	75 uh.	350 uh.	350 uh.
Approximate Input Inductance	150 henries	150 henries	500 henries	500 henries
Phase Angle (Unloaded)	Dependant upon frequency and ratio setting, but very small.			

SUMMARY OF COMPLETE PT SERIES

The various models in the PT Series of Standard Ratio Transformers have been designed to cover specific applications.

Electrically, all models are basically the same. The principle differences are in mechanical construction and such details as the type of switch, number of decades, degree of resolution, maximum input voltage allowable, form factor and other details sometimes important to the user.

The following table has been prepared, segregating the units into two basic classifications, according to their electrical performance, to aid the user in selecting the proper unit for his particular applications. For more detailed information regarding a particular unit, please refer to the preceding tables and specific information.

LOW VOLTAGE, HIGH FREQUENCY GROUP

Maximum RMS input voltage .35 × F (350 volts max.) F = frequency in cps.
Input inductance 150 henries (approx.)

Model No.	Switch Type	No. of Decades	Significant Figures of Resolution	Type of Potentiometer	Remarks
PT-1	Push Button	3	6	10 turn	Three decade unit with 10 turn potentiometer. Utilizes push button switches. For low voltage input over wide frequency range. Calibrations engraved on push buttons. Best general instrument where moderate accuracy is required.
PT-2	Push Button	5	5	None	Five decade unit. No potentiometer. For low voltage, wide frequency range use. Calibrations engraved on push buttons.
PT-5	Rotary	5	6	1 Turn	Five decade unit with one turn potentiometer. Extremely good resolution. Calibration available through window in panel. Best general purpose instrument where low voltage input, high resolution and wide frequency range are important factors.
PT-6	Rotary Heavy Duty	5	5	None	Five decade unit. No potentiometer. For low voltage, wide frequency use. Contains heavy duty, rotary switches with calibration screened on front panel.
PT-7	Rotary (Heavy Duty)	5	6	1 Turn	Five decades and one turn potentiometer. Extremely good resolution. For low voltage wide frequency range use. Calibrations screened on front panel. Heavy duty rotary switches.

HIGH INPUT VOLTAGE, LOW FREQUENCY GROUP

Maximum input voltage, 2.5 × F (350 volts max.) F = frequency in cps.
Input inductance 500 henries. (Approx.)

Model No.	Switch Type	No. of Decades	Significant Figures of Resolution	Type of Potentiometer	Remarks
PT-3	Push Button	5	5	None	Five decade unit. No potentiometer. For high voltage, low frequency use. Calibrations engraved on push-buttons.
PT-4	Rotary	5	6	1 Turn	Five decade unit with one turn potentiometer. Rotary switches with calibration on front panel. For high voltage low frequency use.
PT-8	Rotary Heavy Duty	5	5	None	Five decades, no potentiometer. For high voltage, low frequency use. Heavy duty rotary switches with calibration on front panel.
PT-9	Rotary Heavy Duty	5	6	1 Turn	Five decade unit with one turn potentiometer. Heavy duty rotary switches. Calibration on front panel. For high voltage, low frequency use.

ADDITIONAL DATA ON THE ACCURACY AND SPECIFICATIONS OF THE MODEL PT-1, RATIO TRANSFORMER

Theoretical analysis of a perfect auto transformer for step-down purposes shows that if the leakage inductance and the winding resistance are uniformly distributed and the turns can be accurately tapped, the accuracy for no load is perfect. Neglecting winding resistance for the moment and considering leakage inductance alone, it is seen that the maximum error due to non-distributed leakage inductance approaches one over the permeability of the core material. In the case of the PT-1, the core material is supermalloy and it has an effective permeability of 70,000 for low frequencies. Thus it is seen that the maximum error to be expected from this cause would be somewhat less than .002%. Non-distributed resistance affects the accuracy in exactly the same manner as non-distributed leakage inductance. Measurements on one of the PT-1 Transformers show that the magnitude of error at 60 cycles caused by non-distributed resistance is insignificant in comparison to the other errors present. These errors become even less significant as the frequency is raised.

Other factors which enter into the accuracy are:

1. Inductance of connecting leads to the transformer.
2. Resistance of connecting leads to the transformer.
3. Loading effects of the potentiometer.
4. Non-linearity and end effects of the potentiometer, that is, the potentiometer not going to zero resistance or not going to full scale.

The first two of these effects are very difficult to evaluate. From the results of measurements taken, it appears that they are possibly one of the main sources of error. Potentiometer loading causes the voltage at the zero end of the potentiometer to be roughly .0001% high with respect to the input voltage and the voltage at the full scale end of the pot to be .0001% low with respect to the full scale voltage. The error at the center of the potentiometer is zero due to this effect. Linearity of the potentiometer enters in in that the potentiometer is across one turn of the 1000 turn transformer. This introduces into the accuracy a sliding scale factor of .0005% since we are using a .5% potentiometer.

Distributed capacitance does not seem to play a very important part until frequencies of the order of 10 kc. are reached. At this point the permeability of the core is also decreasing rapidly so that the performance of the transformer as a whole deteriorates considerably above 10 kc.

We do not have available in our plant any standards suitable for measuring ratios with the accuracy required to be able to specify the accuracy of the PT-1. Such equipment exists in only very few places in the Country. A method which can be used to prove the accuracy consists of obtaining a series of identical resistors. It is not too difficult to construct resistors equal to each other with great precision. If these resistors are then connected in a voltage divider chain it is possible to obtain measurements on the PT-1 to the accuracy required. This has been done using three resistors to obtain a division ratio of 1/3 and 2/3. The PT-1's indicated ratio was in error by less than ten parts in a million on this particular test. This particular test is the only reliable test that we have made to date on the ratio accuracy of the PT-1. This particular PT-1 remains in our laboratory as a standard against which all other PT-1's are checked throughout their total range, that is, every step and throughout the range of the potentiometer. The PT-1 to be tested and the standard PT-1 are hooked up in a bridge circuit and nulled against each other and the deviation noted. All PT-1's generally run within five parts in a million of the total input against the standard PT-1. This is in itself a fairly good check on the accuracy of the PT-1's since they are so reproduceable. Another check is to reverse the input connections of the PT-1 under test. The two ratios indicated must add up to one. They generally do this within five parts in a million of the total input.

The Model PT-2 does not use the potentiometer to divide the voltage across one turn. It uses instead a 100 turn transformer to obtain two more rows of decade buttons. From theoretical considerations, this should remove many of the errors due to potentiometer loading and potentiometer linearity affects and give the PT-2 an over-all greater accuracy specification. As yet this has not been definitely determined.

All of the foregoing considerations and conclusions assume that the PT-1 is unloaded. When the PT-1 is loaded, the internal impedance of the PT-1 itself must be taken into account. This is covered in the brochure.

If the leakage inductance is uniformly distributed, it can be said that the same amount of flux passes through each turn of the transformer. Therefore, the voltage induced across each turn is equal. Also, if the leakage flux for each turn is equal, the voltage dropped across the leakage inductance is equal. Similarly, for equal resistance in the turns, the voltage dropped across the resistances must be equal. Since the voltage across each turn is the vector sum of all these voltages and each component is equal for all turns, the total voltage across each turn is equal. The foregoing analysis applies only if the same current flows through each turn. This is true only if the auto transformer is unloaded.

Leakage inductance depends mainly on the size and geometric configuration of the coil. It is almost independent of the core since most of the leakage flux goes through air. The inductance of a toroidal coil with a core is roughly the inductance of the coil without a core, multiplied by the permeability of the core. This is true if the coil is wound as tighly as possible to the core. Considering the inductance of the coil with no core to be equal to the leakage inductance of the coil with a core, the ratio of total inductance to leakage inductance is the effective permeability of the core. Therefore, the fractional part of the voltage dropped in the leakage inductance is 1/u times the voltage in the perfectly coupled portion of the coil where u is the effective permeability of the core. Due to the configuration of the coil used, it is very unlikely that there is a departure of more than $\pm 50\%$ of the mean leakage inductance per turn in any given turn. Therefore, there is a possibility of error as great as $\pm 50\%$ in the voltage dropped in the leakage inductance of any group of turns. But this voltage is only 1/u times the voltage in the perfectly coupled inductance. Therefore, the fractional error in the total voltage across any group of turns is not likely to exceed 0.5/u.

ADDITIONAL INSTRUCTIONS FOR PT SERIES STANDARD RATIO TRANSFORMERS

Care must be taken when using the PT Series Standard Ratio Transformers with a high voltage input from a fairly low impedance source. Due to the switching arrangements, if two buttons in any given row are pushed at the same time, part of the transformer is shorted out. Circulating currents in this shorted section of the transformer can become very high and possibly either damage or burn out the transformer. For the same reason, if buttons are pushed very rapidly the winding may become shorted for an instant due to the inertia of the switch. This occurs when one button is pushed down so fast that the button which was previously down does not have time to disengage from its contacts before the button being pressed makes contact.

While these transient short circuits are not of particular danger to the transformer, they do cause considerable arcing at the contacts of the switches and are very likely to blow fuses when buttons in the first row are pressed. For this reason, it is recommended that enough series impedance be inserted with the source to limit the maximum short circuit current to 4 amps. This procedure will save many blown fuses and also prolong the life of the switches. The other branches of the bridge circuit should be connected directly across the transformer.

There is no way which we can protect the PT Series Transformers from a burned out winding in case two buttons are pressed in the same row. In some extreme cases, particularly in the first row of buttons, the primary fuse may blow and protect the transformer.

GERTSCH PRODUCTS, INC.
11846 Mississippi Avenue
Los Angeles 25, California

11/17/55

PT-8 SCHEMATIC

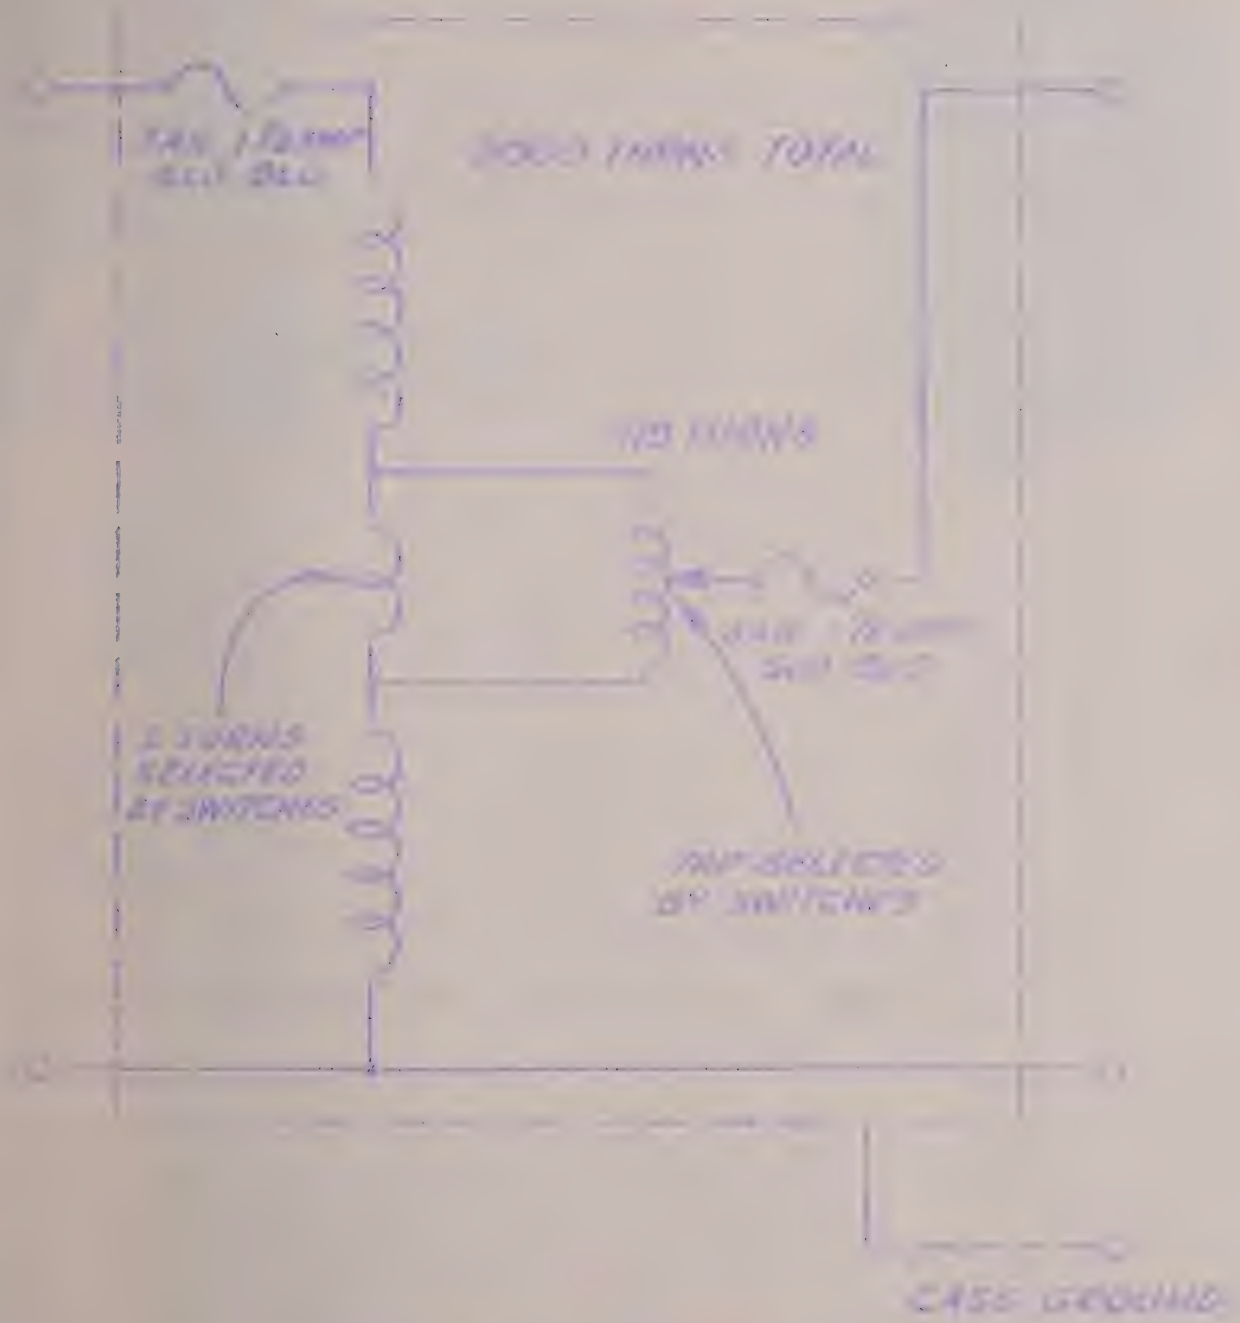

PT-3 SCHEMATIC

GERTSCH

Special Purpose TRANSFORMERS

DGE TRANSFORMERS

The Models 100 and 100A Double Shielded Transformers have been designed for use with the Gertsch Standard Ratio Transformers, to isolate the Null Detector from the Bridge. They also may be used in AC bridges, to isolate the Detector or Generator from the measuring network, or to provide a balanced output from an unbalanced generator. Other applications of Gertsch Bridge Transformers include use as step-up or step-down, or wherever isolation is desired.

In both models, each winding is individually shielded. In the Model 100A, the terminals are also shielded, resulting in complete electrostatic shielding of each winding. Also, a mu metal shield has been included to reduce the external hum pick-up to a minimum.

MODEL 100A

SPECIFICATIONS

	MODEL 100	MODEL 100A
Turns ratio	4 to 1	4 to 1
Intershield capacitance	less than 25 mmf	less than 30 mmf
Frequency range	20 - 5,000 cps	20 - 5,000 cps
DC Resistance, Lo Z	80 ohms	80 ohms
Hi Z	1800 ohms	1800 ohms
Insulation	500 V. test	500 V. test
Input voltage	115 V. at 60 cps*	115 V. at 60 cps*
Height	4 5/16"	4 5/16"
Width (with mounting)	3 11/16"	3 11/16"
Depth (without terminals)	4 1/2"	4 1/2"
Depth (with terminals)	4 7/8"	7 5/8"

* Into Hi Z winding for impedance larger than 100 Ohms across low Z winding

TY RATIO PHASE INVERTING TRANSFORMER - Model 200

Designed for use with Gertsch Standard Ratio Transformers, to provide a phase shift of 180° to the input or output of the Ratio Transformer in certain bridge applications. No shields are supplied around windings. Use with one winding floating is not recommended.

SPECIFICATIONS

Turns ratio:	1 to 1
Effective winding resistance:	10 ohms
Effective leakage inductance:	2.5 mh
Open circuit ratio accuracy:	.005%
Open circuit phase error:	less than .03 milliradian at 400 cps
Voltage into windings:	E_{rms} Max. = .35 f (f is frequency in cps) not to exceed 170 V. RMS
Height:	4 5/16"
Width:	3 11/16"
Depth (without terminals):	4 1/2"
Depth (with terminals):	4 7/8"

GERTSCH PRODUCTS, INC.

11846-48 Mississippi Avenue
Los Angeles 25, California

ECTRICAL SPECIFICATIONS

curacy of Indicated Ratios (Loaded Condition): The accuracy a function of the load applied. Assuming an Ideal Transformer oking into the arm we see an impedance (Ls and Rs) in series h the arm, which is due to leakage inductance, wiring resis- ice, switch resistance, potentiometer resistance and other ay circuit parameters. From these series impedances, the ect of loading upon the transformer and overall accuracy can calculated. In the assumption of the Ideal Transformer the licated unloaded accuracies apply at the arm of the assumed eal Transformer.

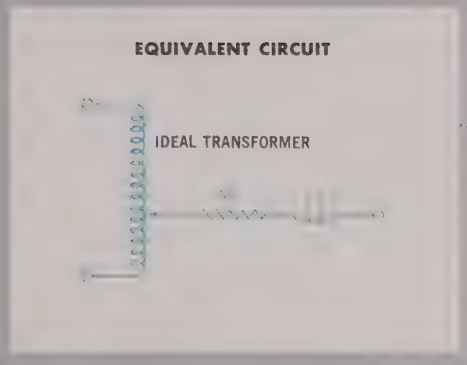

RFORMANCE CHARACTERISTICS · PT SERIES (Unloaded)

	PT-1	PT-2	PT-3
Design Characteristics	Continuously Variable Output	Maximum Accuracy Min. Output Impedance	High Voltage at Low Frequency
Recommended Frequency Range	50-10,000 cps.	50-10,000 cps.	30-1000 cps.
Resolution % of Input	Continuous .0001% Divisions	.001% Steps	.001% Steps
Accuracy of Indicated Ratio 50 cps.—3 KC (PT-1 and PT-2) 30-1000 cps. (PT-3)	$\pm(.004\% + \frac{.0006\%}{R})$ Including Pot. $\pm(.004\% + \frac{.0001\%}{R})$ Pot. Set to Zero	$\pm(.004\% + \frac{.0001\%}{R})$	$\pm(.004\% + \frac{.0001\%}{R})$
Accuracy of Indicated Ratio 3.0-10 kc.	$\pm(.01\% + \frac{.0006\%}{R})$ Including Pot. $\pm(.01\% + \frac{.0001\%}{R})$ Pot. Set to Zero	$\pm(.01\% + \frac{.0001\%}{R})$	
Maximum Input Voltage ERMS Max.	.35f, f in CPS 350 volts above 1000 CPS	.35f, f in CPS 350 volts above 1000 CPS	2.5 f, f in CPS 350 volts above 140 CPS
Maximum Effective Series Resistance (RS)	12 ohms Ratio .545500 5 ohms Ratio .545000 (Transformer Only)	3 ohms	4 ohms
Maximum Effective Series Inductance (LS)	160 uh. at 1.0 KC 100 uh. at 10 KC	160 uh. at 1.0 KC 100 uh. at 10 KC	700 uh. at 1.0 KC
Approximate Input Inductance	150 henries	150 henries	500 henries
Phase Angle (Unloaded)	Dependant upon frequency and ratio setting, but very small.		

TYPICAL APPLICATIONS

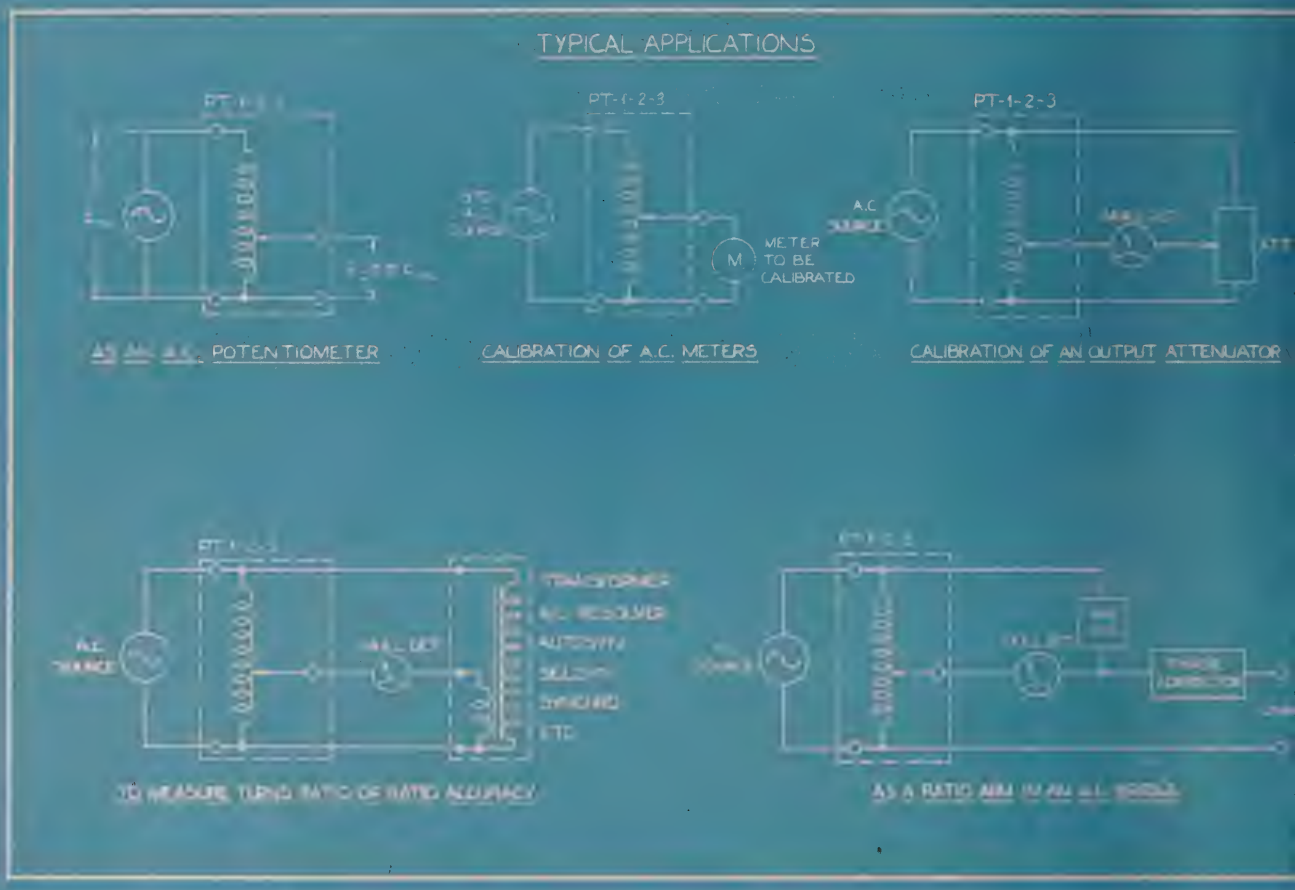

The above Application Diagrams omit the bridging transformer required to isolate the Null Detector. For those applications where a Null Detector is necessary, Gertsch Products, Inc. has designed the Model 100 Bridge Transformer, suitable for this purpose, as well as for many other bridge applications. For applications which require 180° phase shift at unity voltage ratio, the Gertsch Model 200 Transformer is also available. For further data concerning the Model 100 and Model 200 Transformers see Gertsch brochure illustrating those items.

FOR FURTHER INFORMATION REGARDING THE PT SERIES AND OTHER GERTSCH PRODUCTS, CONTACT THE FACTORY OR YOUR NEAREST GERTSCH ENGINEERING REPRESENTATIVE.

REPRESENTED BY:

GERTSCH

SHORT FORM CATALOG #2

ISION ELECTRONIC INSTRUMENTS

Frequency Measuring Equipment

L.F. through Microwave, 100 kilocycles to 12,500 megacycles

Standard Ratio Transformers

AC voltage dividers, capable of extreme accuracy and resolution in measurement and generation of AC voltage ratios

Peak Reading Volt Meters

Wide band, peak reading vacuum tube voltmeters

Deviation Meters

Completely transistorized Peak Modulation Deviation Meters, continuous coverage from 20 to 640 mc.

Special Purpose Transformers

Bridge Transformers and Unity Ratio Phase Inverting Transformers designed for use with Standard Ratio Transformers

PRECISION ELECTRONIC INSTRUMENTS

Gertsch Products, Inc., 11846 Mississippi Avenue, Los Angeles 25, Calif., BRadshaw 2-0568

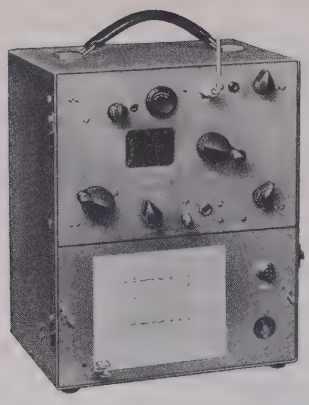

FM-3

VHF FREQUENCY METER - FM-3

Direct reading VHF frequency meter, known as the standard of industry. Extremely accurate and stable units (.001%), desig for measurement and generation of frequencies. Basic frequ range is 20 to 40 mc. Using harmonics, the FM-3 will mea and generate frequencies from 20 to 640 mc. and up to 1000 under certain conditions, with continuous coverage over the en range. Also frequencies down to 1 mc. can be measured. May used to set peak deviation on FM transmitters.

Direct reading, with no calibration book necessary. Exceeds requirements for accuracy and stability. May be standardized aga W.W.V. Internal 1 kc. modulation. Available in convenient port case with handle, or for rack mounting.

Model FM-3 (battery operated)	$68
Model FM-3/PS-3 (AC power operated)	74
Model FM-3R (rack mounted - without cabinet)	76
Model FM-3R (rack mounted - with case)	79
Model PS-3 Power Supply	5
Model PS-3C Power Supply	5

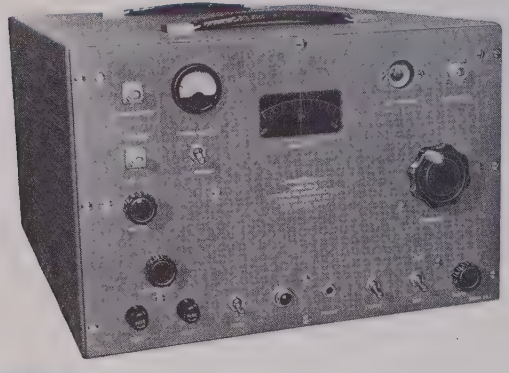

FM-4

MICROWAVE FREQUENCY MULTIPLIER - FM-4

Capable of measuring and generating frequencies in the UHF microwave regions with a high degree of accuracy. It requires auxiliary driving source such as the FM-3 or the AM-1 shown this page. Basic frequency range is 500 to 1000 mc. Using harmo it will measure and generate frequencies from 500 to 12,500 m cycles with continuous coverage. Using special techniques, opera well above 12,500 mc. can be obtained. It will measure frequen down to 100 mc.

The accuracy and stability is primarily a function of the driving For example, when driven by the FM-3, the accuracy and stab are .001%. When driven by the AM-1, with proper auxiliary eq ment, accuracy and stability are as good as .00001%.

Model FM-4 (shown)	$1,65
Model FM-4R (rack mounted)	1,65

FM-5

FREQUENCY DIVIDER - FM-5

The Model FM-5, when driven by a VHF frequency meter, is cap of measuring or generating frequencies in the "low" through "hi frequencies with a high degree of accuracy. It is designed specifi to extend the frequency measuring range of either the FM-3 or A down to 50 kc. and the frequency generating range down to 200 with no loss in accuracy. Measures and generates up to 20 mc. continuous coverage.

Accuracy and stability of the FM-5, when driven by the FM-3 .001%. When used with the AM-1, and suitable auxiliary eq ment, accuracy and stability are .00001%.

Model FM-5 (shown)	$425
Model FM-5/PS-3 (AC power operated)	48
Model FM-5R (rack mounted model with metal case)	53
Model FM-5R (rack mounted model without metal case)	50

AM-1

VHF INTERPOLATOR - AM-1

Auxiliary equipment designed primarily to extend the range of isting frequency standards. Using harmonics, it is capable of m uring and generating any frequency within the range of 20 to 1 mc. It requires, for operation, (1) input from a 100 kc. stan and (2) equipment to measure accurately frequencies between 1 2 megacycles, such as a counter.

Its accuracy and stability are primarily a function of the 100 source and the 1 to 2 mc. measuring equipment. Accuracies as g as 1 part in 10^7 (1 cycle in 10 megacycles) can be obtained. mate accuracy approaches 1 part in 10^8.

Model AM-1	$1,50

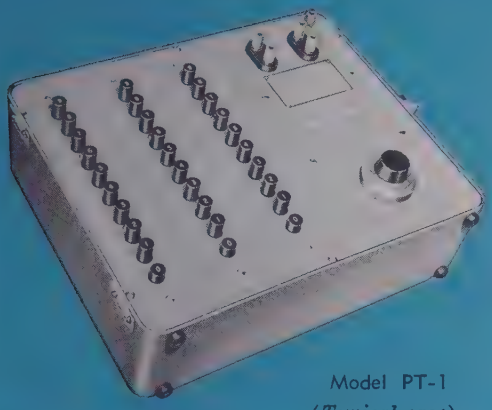

Model PT-1
(*Typical case*)

Model PT-7R
(*Typical rack*)

Model PT-3
(*Typical case*)

Model PT-5
(*Typical tilt-up*)

AC VOLTAGE DIVIDERS

Precision auto-transformers (AC voltage dividers) capable of extreme accuracy and resolution in the measurement and generation of AC voltage ratios. Nine different models are available to cover specific applications. Electrically, all models are basically the same. The principle differences are in mechanical construction and such details as the type of switch, number of decades, degree of resolution, maximum input voltage allowable, form factor, and other details shown below. The PT-1, 2, 5, 6, and 7 are low voltage, high frequency models. The PT-3, 4, 8, and 9 are high input voltage, low frequency models. Case and rack models are available for all types. All accuracy specifications given below are under no load conditions. All PT units are usable outside their indicated frequency range with reduced accuracy.

PT-1 Ratio can be set by means of 3 decade switches and a ten turn potentiometer. Push button.
Accuracy $\pm$ $(.004\% + \frac{.0006\%}{R})$ where R is ratio.
Range 50 to 3000 cps. **$330.00**

PT-2 Same as PT-1 except potentiometer is replaced with 2 extra decade switches.
Accuracy $\pm$ $(.004\% + \frac{.0001\%}{R})$.
Range is 50 to 3000 cps. **$400.00**

PT-3 Same as PT-2, except for higher voltage at lower frequencies. Particularly useful at 60 cycles.
Accuracy $\pm$ $(.004\% + \frac{.0001\%}{R})$.
Range is 30 to 1000 cps. **$540.00**

PT-4 5 decade, rotary switches and a one-turn potentiometer. Accuracy $\pm$ $(.004\% + \frac{.0001\%}{R})$
Range 30 to 1000 cps. **$540.00**

PT-5 5 decade, rotary switches and a one-turn potentiometer.
Accuracy $\pm$ $(.004\% + \frac{.0001\%}{R})$.
Range 50 to 3000 cps. **$400.00**

PT-6 Heavy duty ruggedized model. Five decade, rotary switches, no potentiometer.
Accuracy $\pm$ $(.004\% + \frac{.0001\%}{R})$.
Range 50 to 3000 cps. **$450.00**

PT-7 Heavy duty ruggedized model. Five decade, rotary switches, with one-turn potentiometer.
Accuracy $\pm$ $(.004\% + \frac{.0001\%}{R})$.
Range 50 to 3000 cps. **$455.00**

PT-8 Heavy duty ruggedized model. Five decade, rotary switches, no potentiometer.
Accuracy $\pm$ $(.004\% + \frac{.0001\%}{R})$.
Range 30 to 1000 cps. **$550.00**

PT-9 Heavy duty, rotary switch model. Five decade unit with one-turn potentiometer.
Accuracy $\pm$ $(.004\% + \frac{.0001\%}{R})$.
Range 30 to 1000 cps. **$590.00**

SPECIFICATIONS

LOW VOLTAGE, HIGH FREQUENCY GROUP

Maximum RMS input voltage .35 x F(350 volts max.) F=frequency in cps. — input inductance 150 henries (approx.)

Model No.	Switch Type	No. of Decades	Significant Figures of Resolution	Type of Potentiometer	Remarks
PT-1	Push Button	3	6	10 turn	Three decade unit with 10 turn potentiometer. Utilizes push button switches. For low voltage input over wide frequency range. Calibrations engraved on push buttons. Best general instrument where moderate accuracy is required.
PT-2	Push Button	5	5	None	Five decade unit. No potentiometer. For low voltage, wide frequency range use. Calibrations engraved on push buttons.
PT-5	Rotary	5	6	1 turn	Five decade unit with one turn potentiometer. Extremely good resolution. Calibration available through window in panel. Best general purpose instrument where low voltage input, high resolution and wide frequency range are important factors.
PT-6	Rotary (Heavy Duty)	5	5	None	Five decade unit. No potentiometer. For low voltage, wide frequency use. Contains heavy duty, rotary switches with calibration screened on front panel.
PT-7	Rotary (Heavy Duty)	5	6	1 turn	Five decades and one turn potentiometer. Extremely good resolution. For low voltage wide frequency range use. Calibrations screened on front panel. Heavy duty rotary switches.

HIGH INPUT VOLTAGE, LOW FREQUENCY GROUP

Maximum input voltage, 2.5 x F(350 volts max.) F=frequency in cps. — Input inductance 500 henries. (approx.)

Model No.	Switch Type	No. of Decades	Significant Figures of Resolution	Type of Potentiometer	Remarks
PT-3	Push Button	5	5	None	Five decade unit. No potentiometer. For high voltage, low frequency use. Calibrations engraved on push-buttons.
PT-4	Rotary	5	6	1 turn	Five decade unit with one turn potentiometer. Rotary switches with calibration same as PT-5. For high voltage low frequency use.
PT-8	Rotary (Heavy Duty)	5	5	None	Five decades, no potentiometer. For high voltage, low frequency use. Heavy duty rotary switches with calibration on front panel.
PT-9	Rotary (Heavy Duty)	5	6	1 turn	Five decade unit with one turn potentiometer. Heavy duty rotary switches. Calibration on front panel. For high voltage, low frequency use.

PEAK DEVIATION METER

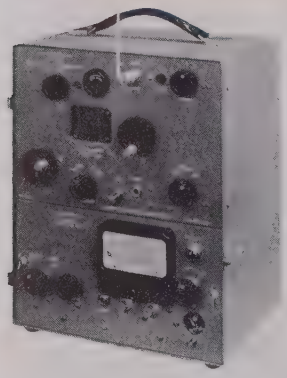

DM-1

peak modulation deviation meter

(shown installed in FM-3)

The DM-1 fits into the lower compartment of the FM-3 Frequency Meter, making one single portable package capable of measuring and generating carrier frequencies PLUS reading peak modulation deviation with continuous coverage from 20 to 640 megacycles. The DM-1 is a completely transistorized unit, with a deviation range of 15 kc. full scale.

Accuracy of deviation measurement: 5% of full scale
Sensitivity: less than .1 volt required for satisfactory limiting at any frequency in the range.

Ruggedized design using miniature components and self-contained transistor-type batteries. Low power consumption plus automatic cut-off switch provide unusually long battery life. Stabilized for wide temperature range. Phone jack for monitoring. DM-1 only, **$375.00.** FM-3/DM-1 in portable carrying case, **$1117.50.** The DM-1 is also available, as a separate item, in drawn aluminum carrying case with cover, DM1-C, at **$405.00** and Rack mounted, DM1-R at **$400.00.**

PEAK VOLTMETER

VM-1

peak reading vacuum tube voltmeter

The Model VM-1 is a true Peak Reading Vacuum Tube Voltmeter, designed to measure either postive peak, negative peak, or peak to peak voltage of repeated pulses with very short duty cycles. The instrument comes complete with probe.

Basic range is 1-100 volts full scale. Accuracy of the basic instrument is 3% of full scale. Accuracy with multipliers is 5% of full scale.

The following multipliers are available:

VM1-A .....300 volt
VM1-B .....1000 volt
VM1-C .....3000 volt
VM1-D .....10 and 30 kv

Model VM-1 ..... **$405.00**
Model VM1-A, B, C **55.25**
Model VM1-D **205.00**

GERTSCH

where skilled engineering produces precision performance

At Gertsch Products, we devote all of our time to the development and production of precision electronic instruments. Almost a quarter of our plant area and a full complement of engineers and scientists are employed in constant research and development of new devices which will provide the engineer with better development instruments and the production line with more adequate test equipment. Before we ever produce a new instrument it is first tested completely in our own plant, then field tested to be sure its operation meets the original specifications.

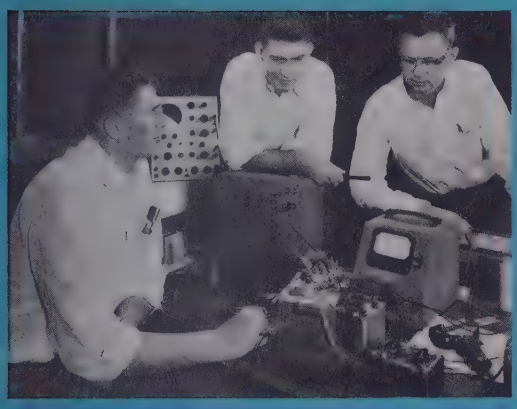

DESIGNING NEW INSTRUMENTS

Our engineering staff spends many months on the design of new equipment before putting it into actual production. The staff is made up of qualified engineers, with experience in all types of electronic equipment. Each member has had research and development experience as well as production experience.

PERFECTING PRESENT INSTRUMENTS

The Gertsch line of precision electronic instruments is relatively small, but it is complete in each category. Our Frequency Meter line, started with only one instrument, has now grown to four, with variations in specifications and physical make-up of each available to fit every conceivable requirement. Our Standard Ratio Transformer line includes nine models and each is available in several case configurations.

PLANNING NEW TECHNIQUES

We are in constant touch with the industry's new developments and work them into present production of listed instruments as well as in the devices being planned. Newest techniques, use of transistors, and the ruggedization of equipment have been incorporated in the present Gertsch instruments. Many more are in the planning stages.

PRODUCING QUALITY EQUIPMENT

Our engineering department has developed a complete set of test equipment for checking all Gertsch instruments produced. It is a complete test rack and is capable of testing our regular schedule of production as well as almost any special instruments which we might be called upon to produce. In-line tests are made of all sub-assemblies. Incoming inspection is made on a 100% basis for all critical items.

BRIDGE TRANSFORMERS

The Models 100 and 100A Double Shielded Transformers have been designed for use with the Gertsch Standard Ratio Transformers, to isolate the Null Detector from the Bridge. They also may be used in AC bridges, to isolate the Detector or Generator from the measuring network, or to provide a balanced output from an unbalanced generator. Other applications of Gertsch Bridge Transformers include use as step-up or step-down, or wherever isolation is desired.

In both models, each winding is individually shielded. In the Model 100A, the terminals are also shielded, resulting in complete electrostatic shielding of each winding. The 100A also has a mu metal shield to reduce the external hum pick-up to a minimum.

Model 100 ..... **$36.00**

Model 100A **85.00**

Specifications:

	MODEL 100	MODEL 100A
Turns ratio	4 to 1	4 to 1
Intershield capacitance	less than 25mmf	less than 30 mmf
Frequency range	20 - 5,000 cps	20 - 5,000 cps
DC Resistance, Lo Z	80 ohms	80 ohms
Hi Z	1800 ohms	1800 ohms
Insulation	500 V. test	500 V. test
Input voltage	115V. at 60 cps*	115V. at 60 cps*
Height	4 5/16"	4 5/16"
Width (with mounting)	3 11/16"	3 11/16"
Depth (without terminals)	4 1/2"	4 1/2"
Depth (with terminals)	4 7/8"	7 5/8"

* Into Hi Z winding for impedance larger than 100 Ohms across low Z windi

UNITY RATIO PHASE INVERTING TRANSFORMERS

Model 200 designed for use with Gertsch Standard Ratio Transformers, to provide a phase shift of 180° to the input or output of the Ratio Transformer in certain bridge applications. No shields are supplied around windings. Use with one winding floating is not recommended.

Model 200 ..... **$54.00**

SPECIFICATIONS

Turns ratio:	1 to 1
Effective winding resistance:	10 Ohms
Effective leakage inductance:	2.5 mh
Open circuit ratio accuracy:	.005%
Open circuit phase error:	less than .03 milliradian at 400 cps
Voltage into windings:	E Max. = .35 f rms (f is frequency in cps) not to exceed 170 V. RMS
Height:	4 5/16"
Width:	3 11/16"
Depth (without terminals):	4 1/2"
Depth (with terminals):	4 7/8"

VOLTMETER CALIBRATION TRANSFORMERS

Model 201. Designed for calibrating vacuum tube voltmeters. **Input:** 300 volts RMS. 400 cps. **Outputs:** (V RMS) 300, 100, 30, 10, 3, 1.440 (equals 2.037 volts peak which is equal to 2 standard cells in series), 1.0, .8, .6, .4, .3, .2, .1, .03, .01, .003, .001. Accuracy of voltage ratios better than .01%. Enclosed in drawn aluminum can, with terminals. Overall size 6⅞" x 6⅞" x 4½" (high).

Model 201 ..... **$415.00**

BP SERIES FILTERS

Passive filter units with extreme attenuation outside the pass band (at least 40 db) and sharp cut-off (attenuation rate 80 db per ½ octave). Can be used as low pass, high pass, or band pass.

BP-1 Range 37.5 - 13,600 cps. in half octave steps. Hi and Lo-pass sections can be used in tandem to provide band pass in multiples of ½ octave. 600 ohms. **$2,400.00**

BP-2 Similar to BP-1 but 10 - 160 kc. 135 ohms **1,500.00**

BP-3 Similar to BP-1 but 6.65 - 37.5 cps. 600 ohms **3,675.00**

PS-3 POWER SUPPLY

Regulated power supply for use with FM-3. Provides operation at either 110 or 220 volts. 50/60 cycles. **$50.00**

PS-3C POWER SUPPLY

Cased portable version of the PS-3. Used with FM-3 when both AC and battery operation are desired. **$55.00**

All data and prices are subject to change without notice. Prices shown are F.O.B. factory.

10-55 - LITHO IN U.S.A. Prepared by Larson-Whittington Assoc., Inc.

Sales representatives in most principal cities of U.S. and Canada. Facilities for export available. For further information contact your nearest Gertsch representative or the factory.

GERTSCH PRODUCTS, INC.
11846 Mississippi Avenue
Los Angeles 25, California
Phone BRadshaw 2-0568

Represented by:

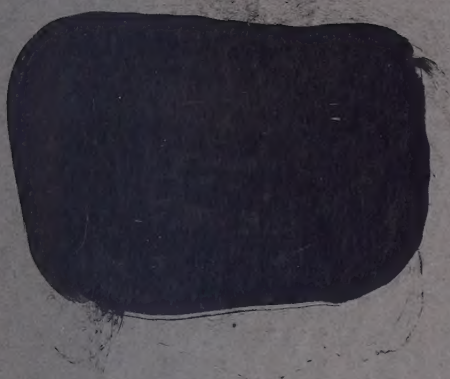

ADVANCO

PRESSBOARD BINDER

No. 218-R

MADE IN U. S. A.